


DGTP & GTP SERIES

JOINT WIDTH UP TO 110MM | MOVEMENT UP TO ±38MM

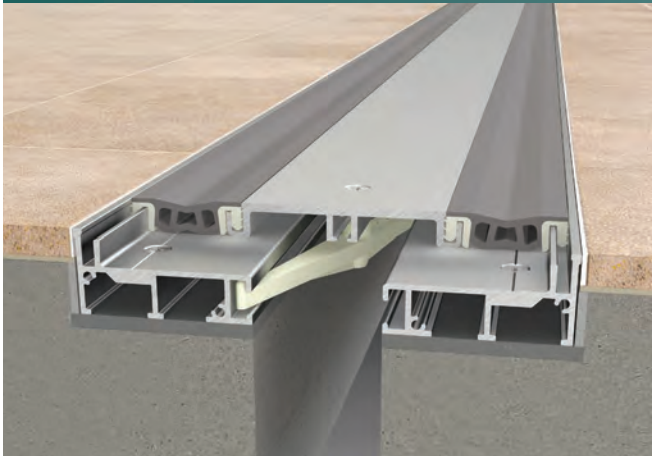

Recess mounted flush floor covers designed for applications with larger movement requirements.

- Recess mounted aluminium floor joint covers featuring two TPR gaskets to accommodate larger movement
- Durable, self-centring aluminium plate spans joint opening
- Easy to clean; ideal for interiors where hygiene is important
- Suitable for areas where light wheeled equipment is in use
- GTP(W) models require a consistent joint width
- DGTP(W) models can be fitted over a range of joint widths
- Gaskets are replaceable on-site
- Load capability: 250kg point load



FLOOR FINISH | Carpet | Vinyl | Wood | Tile | Terrazzo | Stone

FLOOR TO FLOOR COVERS


Model	Joint width range (mm)	Frame depth (mm)	Exposed surface (mm)	Min. recess required (mm)		Movement (mm)		
				Depth*	Width	↔	↕	↗↘
DGTP-200	35-58	30	165	35	175	±20	±8	±6
DGTP-300	53-85	30	254	35	264	±38	±12	±8
DGTP-400	53-110	30	279	35	289	±38	±15	±8
GTP-200	50	16	165	21	175	±20	±8	±6
GTP-300	75	16	254	21	264	±38	±12	±8
GTP-400	100	16	279	21	289	±38	±15	±8

* From FFL

FLOOR TO WALL COVERS

Model	Joint width range (mm)	Frame depth (mm)	Exposed surface (mm)	Min. recess required (mm)		Movement (mm)		
				Depth*	Width	↔	↕	↗↘
DGTPW-200	10-54	30	108	35	113	±10	±2	±3
DGTPW-300	20-80	30	164	35	169	±19	±3	±4
DGTPW-400	20-105	30	189	35	194	±19	±5	±4
GTPW-200	50	16	108	21	113	±10	±2	±3
GTPW-300	75	16	164	21	169	±19	±3	±4
GTPW-400	100	16	189	21	194	±19	±5	±4


DGTP-200



Flush aluminium centre plate is natural anodised as standard.


Deep frame models offer installation flexibility, as they can be installed over joints with varying widths. DGTP-200 for example can be fitted over joints from 35 to 58mm wide, whilst maintaining the same movement capability.

GTP-200




Shallow frame models require a consistent joint width along their length.

DGTPW-200



Wall frames are natural anodised as standard.

GTPW-200



Our TPR gaskets are smooth, strong and offer a hygienic seal.

MATERIALS, COLOURS AND FINISHES

- **Aluminium sections:** mill finished as standard, except for flush centre plate and wall frames, which are supplied in a natural anodised finish.
- **Gaskets:** co-extruded Thermoplastic Rubber (TPR) gaskets are available in four standard colours. Other colours can be supplied subject to minimum quantity.

BLACK

WHITE

GREY

GREIGE

COMPLEMENTARY WALL/CEILING COVERS

GTW series ▶ 53

For more information visit:
www.c-sgroup.co.uk/3984

ACCESSORIES

- Fire Barriers ▶ 90-91
- Moisture Barriers ▶ 92
- Acoustic Barriers ▶ 93

STOCK LENGTHS

- **Aluminium sections:** 3m
- **Gaskets:** supplied cut to suit from [max] 32m rolls

FIXINGS

- **Floor:** fixings (by others) to suit substrate at 450mm centres and to achieve minimum 40mm embedment
- **Wall:** fixings (by others) to suit substrate at 450mm centres

NB: Frames are supplied undrilled.