


# GFT SERIES

JOINT WIDTH UP TO 50MM | MOVEMENT UP TO ±10MM

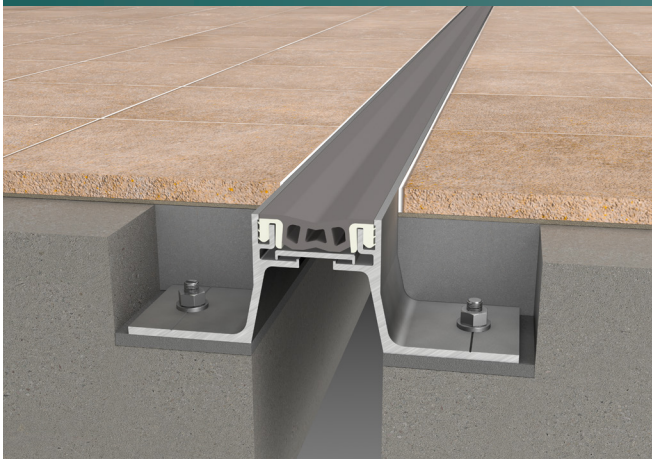


Recess mounted floor joint covers with minimal visual impact, offered in a range of frame depths to suit floor finish.

- Floor covers comprising extruded aluminium frames and a single gasket
- Suitable for most floor finishes. Mixed frame depths can be supplied to suit selected floor finish(es)
- GFTW versions can be used for floor-to-wall, or new-to-existing conditions
- Easy to clean covers for interior areas where hygiene is important
- Gaskets are replaceable on-site
- Load capability: 250kg point load



FLOOR FINISH | Carpet | Vinyl | Wood | Tile | Terrazzo | Stone

## FLOOR TO FLOOR COVERS

Model	Joint width (mm)	Frame depth (mm)	Exposed surface (mm)	Min. recess required (mm)		Movement (mm)		
				Depth*	Width	↔	↕	↗↘
GFT-100/25	25	25	30	30	135	±5	±3	±2
GFT-100/50	25	51	32	56	137	±5	±3	±2
GFT-100/75	25	75	32	80	137	±5	±3	±2
GFT-200/25	50	25	47	30	158	±10	±3	±3
GFT-200/50 	50	51	48	56	158	±10	±3	±3
GFT-200/75	50	75	48	80	158	±10	±3	±3


\* From FFL

 This model is available on **CS Rapid Ship** for delivery within 3 working days (Black or Grey gaskets only). See ▶ 94 for details.


## FLOOR TO WALL COVERS

Model	Joint width (mm)	Frame depth (mm)	Exposed surface (mm)	Min. recess required (mm)		Movement (mm)		
				Depth*	Width	↔	↕	↗↘
GFTW-100/25	25	25	32	30	80	±5	±3	±2
GFTW-100/50	25	51	32	56	82	±5	±3	±2
GFTW-100/75	25	75	32	80	82	±5	±3	±2
GFTW-200/25	50	25	48	30	103	±10	±3	±3
GFTW-200/50	50	51	48	56	104	±10	±3	±3
GFTW-200/75	50	75	48	80	104	±10	±3	±3


### GFT-100/25

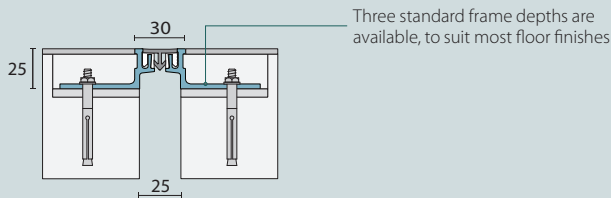


### GFT-200/50

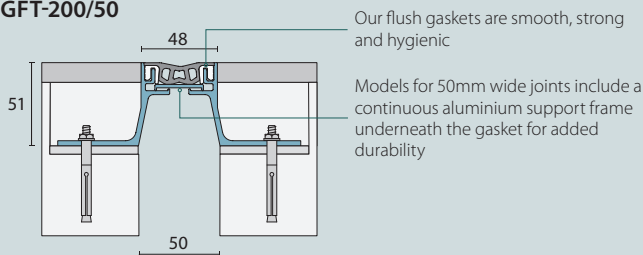

### GFTW-100/25

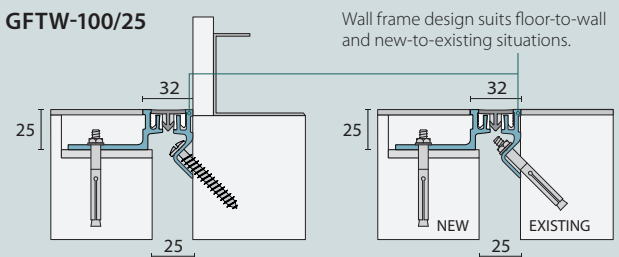

### MIXED FRAME CONFIGURATION

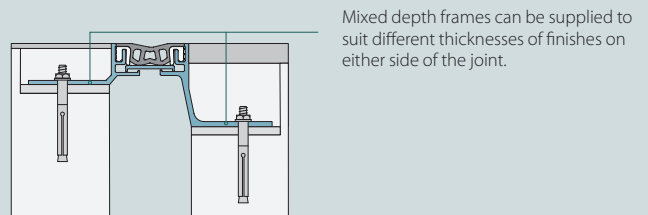

## MATERIALS, COLOURS AND FINISHES

- **Aluminium sections:** mill finished as standard, except for exposed wall frames which have a natural anodised finish.
- **Gaskets:** co-extruded Thermoplastic Rubber (TPR) gaskets are available in four standard colours. Other colours can be supplied subject to minimum quantity.

BLACK

WHITE

GREY

GREIGE

## COMPLEMENTARY WALL/CEILING COVERS

- FWF Series ▶ 50
- FWFP Series ▶ 51

For more information visit:  
[www.c-sgroup.co.uk/3859](http://www.c-sgroup.co.uk/3859)

## ACCESSORIES

- Fire Barriers ▶ 90-91
- Moisture Barriers ▶ 92
- Acoustic Barriers ▶ 93

## STOCK LENGTHS

- **Aluminium sections:** 3m
- **Gaskets:** supplied cut to suit from [max] 32m rolls

## FIXINGS

- **Floor:** fixings (by others) to suit substrate at 450mm centres and to achieve minimum 40mm embedment
- **Wall:** fixings (by others) to suit substrate at 450mm centres

NB: To ensure installation flexibility frames are supplied undrilled.