


HRB-20N



143 mm high, Acrovyn PVC-Free hand/crash rails offering pedestrian support and heavy duty impact protection. Two colours can be used to provide visual contrast.

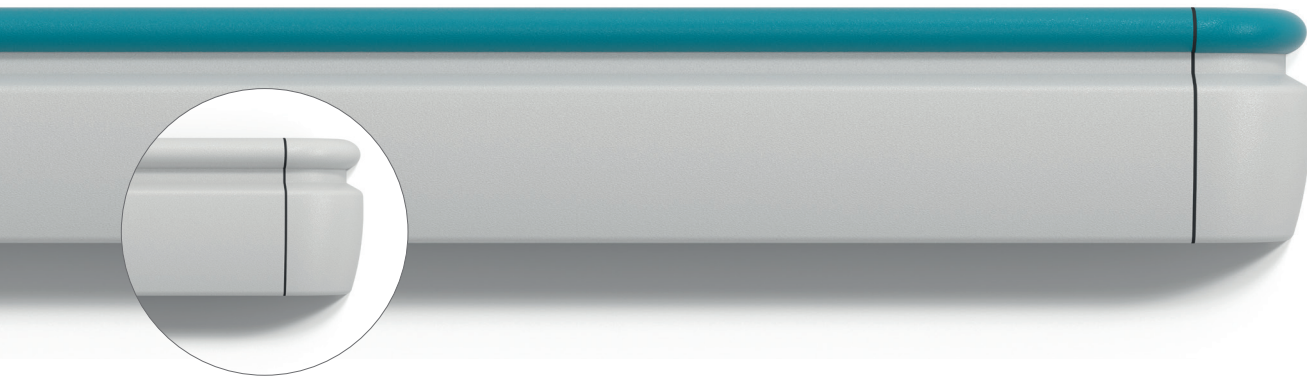

Quick Lock



Heavy Duty



Dual Colour

Features & Advantages

- Comfortable, oval grip handrail available in a range of solid colours
- Impact resistant crash rail cover over continuous aluminium retainer and bumper cushion for effective damage protection
- Two colours can be used for visual contrast or in wayfinding schemes
- Quick Lock brackets for fast installation and easy maintenance
- Infill strip closes off retainer channel for ease of cleaning
- Anti-ligature option featuring continuous, powder coated aluminium bracket

Applications

- Corridors with pedestrian access and regular trolley movement
- Lift lobbies and lifts
- Circulation areas with anti-ligature handrail requirements

Colours & Texture

Solid Colours
15Texture
Shadowgrain

See reverse for details.




c-sgroup.co.uk/134

HRB-20N


Mounting Options

Quick Lock bracket



Quick Lock brackets are supplied in a colour matching crash rail cover as standard.

Anti-ligature bracket



Continuous aluminium brackets are supplied powder coated grey (RAL 7046) as standard.

Accessories

- End caps with Quick Lock feature
- External corners
- Quick Lock brackets (standard)
- Continuous anti-ligature brackets (optional)
- Optional vertical accent trims - black
- Removable kit for service ducts

Stock Lengths & Fixings


- Stock lengths: 3 m
- Brackets at max 800 mm centres; fixing into studwork or pattresses is recommended

Warranty & Lifespan

- 2-year product warranty
- Life expectancy up to 25 years

For Terms and Conditions visit: c-sgroup.co.uk/16727

Colour Selector

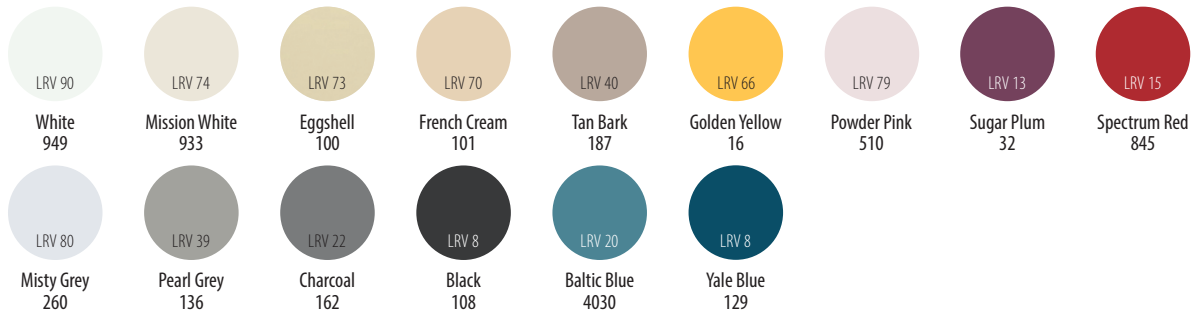

LRV (Light Reflectance Value) indicates the amount of light reflected by a surface and can be used to assess the degree of visual contrast between different surfaces. LRV values for Acrovyn colours have been determined using the CIE Y value measurement method.