





Renderplas PVCu beads provide high performance solutions to Part L compliance, with a high recycled content creating an 'excellent' Ecopoint rating, backed by BBA approval on all external products.

## PVCu drylining beads



Renderplas PVCu drylining beads offer the perfect solution for skim plastering and drywall applications. Because they are made locally from cost-effective recycled PVCu, they offer a value for money alternative to metal products. They are guaranteed not to stain during a lengthy drying out process or in situations with high moisture or salt such as kitchens, bathrooms and pool enclosures. They are particularly well suited to schools, prisons and hospitals as they do not provide any threat to safety either after a heavy impact or if pulled out of the wall.

### Application

Corner beads provide a clean edge and impact protection on external corners. Arch beads create smooth curves in arched reveals. Edge beads provide a clean attractive stop to plasterboard where it meets another finish, such as a brick wall or door frame, and prevent cracking. Architrave beads provide a shadow gap between the wall and ceilings, skirting boards and door frames.

enclosures, but are equally suited to all general plasterboard applications.

### Health & Safety

PVCu beads are completely safe to handle during application and do not have the razor sharp edges of cut metal. They are also preferred in schools, hospitals and prisons as they do not provide any threat to safety either after a heavy impact or if pulled out of the wall.

### Main applications:

- Brick and blockwork
- Timber frame
- Insulation board
- Cement board
- Composite systems
- Plasterboard

### Performance

Like all Renderplas products, the drylining range is manufactured from exterior grade, impact resistant, UV stable unplasticised PVCu. They offer several benefits over metal beads whilst still giving excellent protection from impact and providing clean edges that often do not need painting. PVCu beads are guaranteed never to rust and they will not stain like metal beads can do in lengthy drying periods. They are the perfect choice in situations with high moisture or salt such as kitchens, bathrooms and pool

### Storage, cutting and fixing

Store vertically away from heat and direct sun, or flat if supported along entire length. PVCu beads are fast and easy to cut to length with tin snips or a fine toothed hacksaw. They are simply fixed with nails or staples through the wing of the bead.

### Packing

Supplied in 2.5m or 3.0m lengths in high quality fibreboard tubes or boxes in 6, 25 or 50 lengths per pack as shown in the table overleaf.

### Colours

White in all profiles.



### More information

Detailed product datasheets can be viewed on our website. See [www.renderplas.co.uk](http://www.renderplas.co.uk)



### Kentish Town Sports Centre, London, UK

Flexible PVCu beads made the ideal choice for curved architectural features in the high moisture atmosphere of Kentish Town Sports Centre.


David Andrews  
Construction Ltd





Renderplas PVCu beads provide high performance solutions to Part L compliance, with a high recycled content creating an 'excellent' Ecopoint rating, backed by BBA approval on all external products.

## PVCu drylining beads

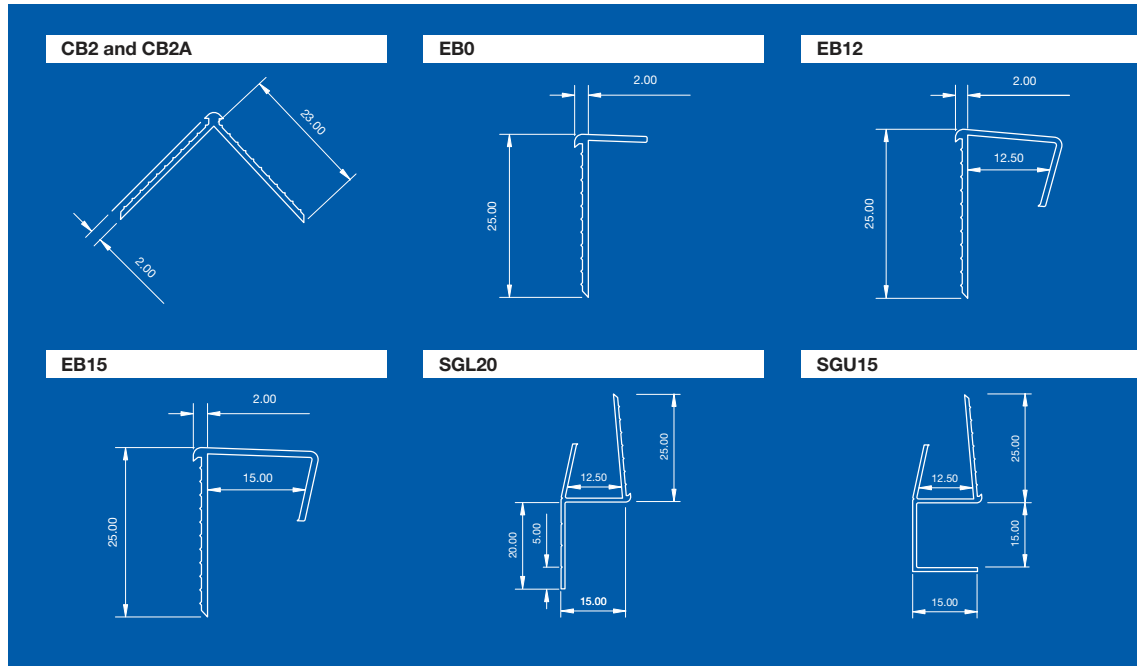

All dimensions are shown in millimetres

Code	Product description	Skim depth (mm)	Weight per pack (kg)	Length (m)	Lengths per pack	Colours
CB2	2mm PVCu skim corner bead	2	4.38	2.5	25	White
CB2-50	2mm PVCu skim corner bead	2	7.00	2.5	50	White
CB2A	PVCu skim arch bead	2	4.38	2.5	25	White
CB2A-50	PVCu skim arch bead	2	7.00	2.5	50	White
EB0	PVCu flexible board edge bead	2	3.44	2.5	25	White
EB0-50	PVCu flexible board edge bead	2	6.02	2.5	50	White
EB12	12.5mm PVCu clip-on edge bead	2	3.88	2.5	25	White
EB12-50	12.5mm PVCu clip-on edge bead	2	7.50	2.5	50	White
EB15	15mm PVCu clip-on edge bead	2	4.56	2.5	25	White
EB15-50	15mm PVCu clip-on edge bead	2	7.62	2.5	50	White
SGL20	PVCu architrave shadow gap 'L' profile	2	2.75	3.0	6	White
SGU15	PVCu architrave shadow gap 'U' profile	2	3.00	3.0	6	White